


Daylight Par 200W




SPECIFICATIONS

Identity No.	L00200DP
Capacity	200W
Lamp Bulb Voltage	70V
Protective Lens	Ø130mm (5-1/8 in.)
Par Lens	Ø130mm (5-1/8 in.)
Lamp Type	HMI 200W SE 5600K
Lamp Holder	GZY9.5
Stirrup	Ø16mm Socket
Class / IP Rating	1 / IP 23
Max. Surface Temp.	190 °C
Max. Ambient Temp.	45 °C
Min. Distance to Illuminated Object	2 m
Min. Distance to Flammable Object	0.5 m
Operating Range	+45° - 0° - -45°
Weight (lamphead)	3.2 kg
Weight (with barndoor)	3.7 kg

DIMENSIONS (mm)

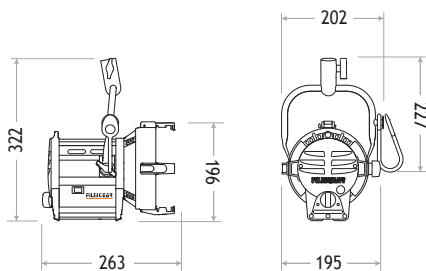

PHOTOMETRIC DATA

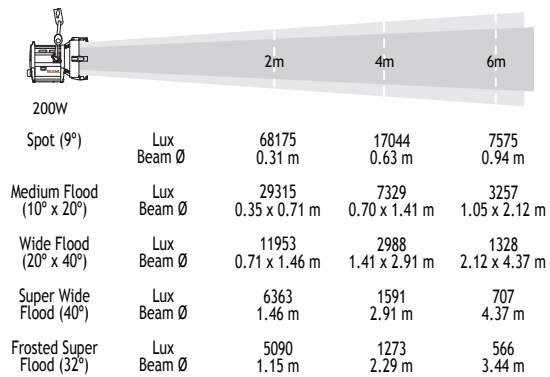

LAMPHEAD CONTENTS

- Aluminium Lamp Housing
 - 4-leaf Rotatable Barndoor with Safety Wire
 - Ø130mm (5-1/8 in.) Protective Lens
 - Set of 5 Par Lenses Ø130mm (5-1/8 in.) with Frames + Lens Case
 - Power Cable with Multipin Connector
 - Stirrup with Ø16mm Socket
- (Requires Electronic Ballast, Lamphead to Ballast Cable and Lamp Bulb)

ACCESSORIES

- 400W/200W Electronic Ballast
- 400W/200W Electronic Ballast AC/DC
- 200W Electronic Ballast
- 200W Electronic Ballast AC/DC
- Head to Ballast Cable 7m (23 ft.)
- Head to Ballast Cable 15m (49 ft.)
- DC Cable 1.5m (5 ft.)
- 4-leaf Rotatable Barndoor
- Set of 5 Par Lenses Ø130mm (5-1/8 in.) with Frames :
 - Spot, Medium Flood, Wide Flood, Super Wide Flood, Frosted Super Flood
- Lens Case
- Set of 4 Scrimms Ø168mm (6-5/8 in.) with Carrying Bag :
 - Full Single Scrim, Full Double Scrim, Half Single Scrim, Half Double Scrim
- Safety Wire